

The Blinking Lamp Company Ltd

Part of **TriFlex** Holdings Ltd



The Complete Solutions Provider



Support Through Knowledge

Our industry is continuing to evolve from improved working practices to safer smarter product advances. The Blinking Lamp Company continually strives to stay at the forefront of change. Our recent acceptance as an information member of the NASC will assist us in providing a full range of industry leading products, and up to date advice.

As always our national team remain on hand to support you from initial consultation, through to project completion. Our in-depth knowledge allows us to assist you in selecting the right product for use first time.

Support Through Stock

The Blinking Lamp has an extensive stockholding backed up with a National Distribution Centre in Bristol. We undertake to stock the majority of products featured in this catalogue. If you are unable to see the product you require, please let us know as we also supply a wide range of products not featured.

Support Through Quality Standards

The Blinking Lamp Company is certified to BS EN 9001:2000.

We actively work with and promote manufacturers whose companies and products achieve the highest possible industry standards. If a supplier fails to attain the appropriate standard or certification, we will source alternative options, or look to have the certification carried out ourselves. A recent example of this would be our Tri-Net FR debris netting, which we have had fully certified by the BRE to the LPS standards.



Support Through Logistics

The Blinking Lamp operates a highly efficient delivery service. Most products will leave our warehouses on the same day your order is placed and normally be delivered within 3 days. The majority of our products can be dispatched and delivered the next day. Please also remember most orders over £100 will be delivered free of charge.

For orders below £100 a small administration charge will apply.





Mission Statement

Service, quality, value for money and customer satisfaction have kept The Blinking Lamp Company at the forefront of the scaffolding and construction industry for over fifteen years. We have been the industry's first choice because our primary focus is, and will remain, you our customer.

The Blinking Lamp Company provides a unique service with a well-trained national sales team with over 100 years of experience. Our wide product range and extensive stockholding, coupled with a prompt delivery service, makes us the ideal supply partner. At The Blinking Lamp Company, no order is too big or too small.

We are also committed to new product development and high business ethics. Please browse our web pages to check out updated product information, training courses and the latest health and safety advice.

Geoff Capes

25 YEARS ON AND STILL GOING STRONG

Former World's Strongest Man and Olympic athlete Geoff Capes is supporting The Blinking Lamp Company. Geoff's association with our products started a quarter of a century ago in 1985 when The World's Strongest Man was pleased to support our range, backed by strength and quality.




To this day, Geoff remains the most capped British athlete with 67 international appearances and 35 outright wins. He won 17 National titles and was twice Commonwealth Champion. He was three times European Champion and competed in three Olympic Games. He was awarded The Queen's Jubilee Medal in 1977.

Geoff turned professional in 1980 to take part in strong man competitions and the Highland Games. He was twice World's Strongest Man and took the titles of Europe's Strongest Man and Britain's Strongest Man on three occasions. He was also World Highland Games Champion on six occasions. His autobiography titled "Big Shot" is a fascinating read.

As you will appreciate, with such an illustrious career, Geoff Capes is in great demand to endorse many companies and products. He remains very discerning with regard to what and who he partners. Therefore we are delighted that he is again offering us his support.

Geoff says "I am very pleased to continue this long association. The philosophy and core values remain as strong as ever and the wide range of products continue to be high in quality and strength".

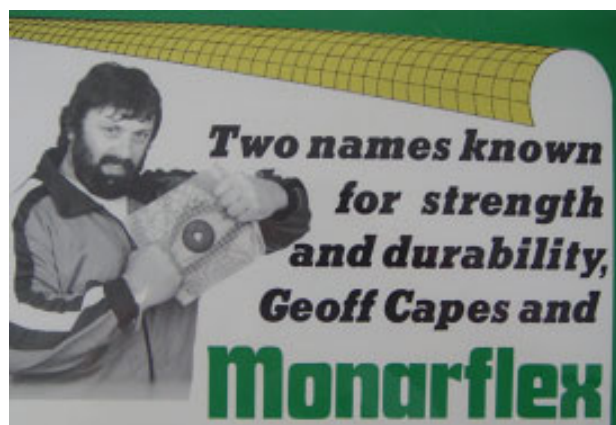



Contents

Scaffold Sheeting Section

5. Scaffold Sheeting & Debris Netting Ties.
6. Super T-Plus Firesmart.
7. Super T-Plus.
8. Scaffband Flamesafe & Scaffband.
9. Tri-Flex FR & Tri-Flex.
10. Vented Sheeting & Temporary Roof Covering.

Printed Solutions Section

11. Digiwrap Airflow Flamesafe.
12. Digiwrap Scaffband Flamesafe & Firesmart Digiwrap.
13. Printed Tri-Flex FR & Tri-Flex Scaffold Sheeting.
14. Tri-Screen Fence Panels & Rolls.
15. Printed Firesmart & Printed Super T-Plus.

Netting Section

16. LPS 1215 Certificated Debris Netting & Netting Ties.
17. Debris Netting & Shade/Stage Netting.
18. Personal Man Safety, Overlay, Drop & Line Crossing Nets.

Personal Fall Protection Equipment Section

19. Miller Harnesses.
20. Miller Harness Kits, Lanyards & Lifelines.
21. Lifelines, Clamps & Inspection Information.
22. Pammenter & Petrie Safety Equipment.
23. Checkmate Safety Equipment.
24. Ridgegear Harnesses.
25. Ridgegear Safety Equipment.

Safety Products Section

26. Printed Banners, Signs & Scaffold Lamps.
27. Tube End Caps, Internal Caps, Fitting Thread Caps, Cubby Caps & Super Seal Plug 2.
28. Hazard Tapes & Sleeving, Armadillo, Footplates and Tubtrugs.
29. Scaffold Products.

Site Consumables Section

30. Polythene, Board Sheeting, Fitting & Bulk Bags, Fencing, Rope & Gin Wheels.

Tools & Equipment Section

31. Scaffold Spanners.
32. Leather Belts & Attachments, Podgers, Levels & Tape Measures.
33. Step Ups, Ladder Gates & Traps.

Skip Products Section

34. Skip Lamps, Microlite, Skip Nets, Boards, Cones & Batteries.

Roofing Section

35. Tyvek Supro & Ultra Breather.
36. Vapour & Gas Barriers.
37. Eavesguard, FormFlash, Securpulley, Tapes & Top Hats.

Work Wear & Safety Section

38. Helmets.
39. Helmets & Straps.
40. Safety Glasses & Goggles.
41. Hearing & Respiratory Protection.

Leisure & Work Wear Section

42. Regatta Jackets.
43. Regatta Fleeces, Softshell & Polo Shirts.
44. Regatta Trousers & Knee-pads.
45. Work Wear Body.
46. Work Wear Body.
47. Work Wear Legs & First Aid Kits.
48. Work Wear Gloves.
49. Work Wear Gloves & Clips.
50. Work Wear Footwear.
51. Work Wear Footwear.
52. Work Wear Footwear.

Supply Partners



Credit and Debit Card Orders Welcome

The Blinking Lamp also offers trade accounts subject to status. Contact us for more details.

We accept these cards:





Scaffold Sheeting

The Blinking Lamp Company is the most experienced and knowledgeable supplier of scaffold sheeting in the UK. We are renowned in the industry for our high level of back up and support and are always on hand to offer practical assistance and advice. From the market leading brands Monarflex and Tri-Flex scaffold sheeting, The Blinking Lamp Company carries one of the most extensive stocks, catering for virtually all potential applications. We provide an unrivalled range of Flame retardant sheeting, with grades that meet and surpass all relevant EN and BS Standards applicable to the industry.

Roll sizes available from stock: 2m, 2.25m, 3m and 4m widths to suit virtually all applications. Additional sizes are available by special order.

Technical literature

Data sheets and samples are available for each product. Please contact your individual sales manager or head office on 01179 828180 to arrange.

Corporate logo and branding options

The Blinking Lamp is able to supply a wide range of client branded sheeting. Each option can be tailored to a specific project of any size. Why not give us a call and arrange for one of our experienced sales managers to attend a meeting, at your convenience, to discuss the various options.

Scaffold Sheeting & Debris Netting Ties

The specification for sheeting ties BS 7955 call for a minimum breaking strength of 500 Newton's. The Anchor & Strap, Euro Strap, Flexitie and Toggle Ties each conform to and exceed the standard. Installation should be in accordance to BS 8410. The scaffold designer/engineer must take into account the tensile strength of the specified ties and qualify the required amount per roll for the application. Regular inspections must be made to ensure the sheeting is securely tied.



Anchor & Strap

Recommended for use with Extreme Firesmart and Extreme Super T-Plus



Euro Strap

Recommended for use with Scaffband Flamesafe DigiWrap



Flexitie

Recommended for use with Scaffband and Tri-Flex sheeting



Toggle Tie

Recommended for use with Scaffband and Tri-Flex sheeting

Netting Ties

4.8mm x 295mm (minimum strength 22.2kg)

Air-Flow Ties

7.6mm x 296mm (minimum strength 54.5kg)

Ladder Ties

12.7mm x 550mm (minimum strength 113.5kg)

Material: Nylon 66

Working Temperature: -40 to +85

UL Flammability Rating: UL94





Scaffold Sheeting

Super T Plus Firesmart

Is the original and remains to this day the best performing scaffold sheeting available. The inherent strength of Firesmart T Plus combined with the unique rubber eyelets resist stresses in all directions. The Anchor & Strap is the only fixing capable of effectively locking two overlapped sheets together; helping maintain the integrity of the area covered, whilst greatly reducing the potential hazard of objects falling from height.

Still the only wind tunnel tested sheeting and fixing available that are better equipped to withstand gusting conditions and the rigours of the construction industry.



Certificated by the BRE to LPBC standards LPS 1215 and LPS 1207



Monarflex
A member of the Icopal Group



RED BOOK LISTED

Super Firesmart T Plus®

Material: High strength reinforced low density polyethylene with a flame retardant formula

Colour: White Opaque

Light transmission: 50%

Roll size	Weight	Eyelets per roll	Eyelet Pullout	Gauge	Grid
2m x 45m	26kg	270	838N	0.2mm	9 x 12mm PET MUJ 1670 dtex
2.25m x 40m	26kg	240	838N	0.2mm	9 x 12mm PET MUJ 1670 dtex
3m x 45m	40kg	360	838N	0.2mm	9 x 12mm PET MUJ 1670 dtex
4m x 36m	43kg	432	838N	0.2mm	9 x 12mm PET MUJ 1670 dtex

Corporate branding (fire retardant)

Modern screen printing allows you to use full colour imagery very cost effectively. This adds value both in terms of marketing impact and also in helping keep valuable sheeting secure from theft.



Without cost or commitment, allow us to arrange for a quotation and artwork incorporating your company details.



Scaffold Sheeting

Super T Plus is the non fire retardant sister product of Firesmart.

Super T Plus retains all the other attributes that make the Super T Plus range so formidable. The Anchor & Strap is the only fixing capable of effectively locking two overlapped sheets together; helping maintain the integrity of the area covered whilst greatly reducing the potential hazard of objects falling from height.


Still the only wind tunnel tested sheeting and fixings available that are better equipped to withstand gusting conditions and the rigours of the construction industry.



Super T Plus					
Material: High strength reinforced low density polyethylene					
Colour: Translucent					
Light transmission: 80%					
Roll size	Weight	Eyelets per roll	Eyelet Pullout	Gauge	Grid
2m x 45m	22kg	270	838N	0.2mm	9x12mm PET MUJ 1670 dtex
2.25m x 40m	22kg	240	838N	0.2mm	9x12mm PET MUJ 1670 dtex
3m x 45m	33kg	360	838N	0.2mm	9x12mm PET MUJ 1670 dtex
4m x 36m	35kg	432	838N	0.2mm	9x12mm PET MUJ 1670 dtex

Corporate branding options (non fire retardant)

Modern screen printing allows you to use full colour imagery very cost effectively. Adding value both in terms of marketing impact and also in helping keep valuable sheeting secure from theft.



Without cost or commitment, allow us to arrange for a full quotation and artwork incorporating your company details.



Scaffold Sheeting

Monarflex Scaffband Flamesafe

Is the economy flame retardant reinforced banded scaffolding sheeting. Tested and passed by the BRE to the LPCB Standard LPS 1215. Exceeds all relevant EN & BS Standards. Designed to be installed with the Monarflex Flexitie fixing.



Full digital client branding options available.



Monarflex Scaffband Flamesafe				
Material: High strength reinforced low density polyethylene with a flame retardant formula				
Thermal stability: -40 to +80				
Colour: White Opaque				
Light transmission: 50%				
Roll size	Weight	Eyelets per roll	Gauge	Grid
2m x 45m	18kg	Pre-punched eyelets every 100mm	0.2mm	8 x 8mm HDPE/PP tape
3m x 45m	27kg	Pre-punched eyelets every 100mm	0.2mm	8 x 8mm HDPE/PP tape

Monarflex Scaffband

The economy reinforced banded scaffold sheeting. Exceeds all relevant EN & BS Standards. Designed to be installed with the Monarflex Flexitie fixing.

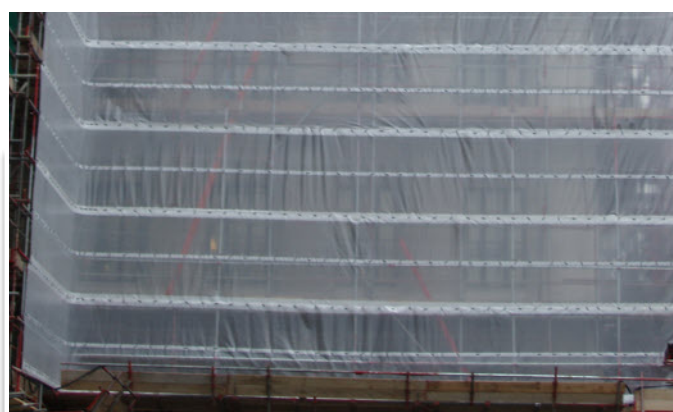

Monarflex Scaffband				
Material: High strength reinforced low density polyethylene				
Thermal stability: -40 to +80				
Colour: Clear				
Light transmission: 70%				
Roll size	Weight	Eyelets per roll	Gauge	Grid
2m x 45m	18kg	Pre-punched eyelets every 100mm	0.2mm	8 x 8mm HDPE/PP tape
3m x 45m	27kg	Pre-punched eyelets every 100mm	0.2mm	8 x 8mm HDPE/PP tape



Tri-Flex FR Flame Retardant Scaffold Sheeting

Our very own flame retardant reinforced scaffolding sheeting. Exceeds all relevant EN & BS Standards.

Performance is equivalent or superior to all other banded scaffold sheeting. Designed to be installed with the toggle tie fixings.

Certificated by the BRE to LPCB standards LPS1207 and LPS1215.




RED BOOK LISTED

Tri-Flex FR				
Material: High strength reinforced low density polyethylene with a flame retardant formula				
Thermal Stability: -40 to +80				
Colour: White Opaque				
Light transmission: 50%				
Roll size	Weight	Eyelets per roll	Gauge	Grid
2m x 45m	18kg	Pre-punched eyelets every 100mm	0.2mm	8x8mm HDPE/PP tape
2.25m x 40m	18kg	Pre-punched eyelets every 100mm	0.2mm	8x8mm HDPE/PP tape
3m x 45m	27kg	Pre-punched eyelets every 100mm	0.2mm	8x8mm HDPE/PP tape

Tri-Flex Scaffold Sheeting

Our own reinforced banded scaffold sheeting. Exceeds all relevant EN & BS Standards. Performance is equivalent or superior to all other banded scaffold sheeting. Designed to be installed with the toggle tie fixing.



Tri-Flex				
Material: High strength reinforced low density polyethylene				
Thermal Stability: -40 to +80				
Colour: Clear				
Light transmission: 70%				
Roll size	Weight	Eyelets per roll	Gauge	Grid
2m x 45m	18kg	Pre-punched eyelets every 100mm	0.2mm	8x8mm HDPE/PP tape
2.25m x 40m	18kg	Pre-punched eyelets every 100mm	0.2mm	8x8mm HDPE/PP tape
3m x 45m	27kg	Pre-punched eyelets every 100mm	0.2mm	8x8mm HDPE/PP tape



Vented Sheeting

Monarflex Airflow Flamesafe is an exceptionally strong flame retardant containment netting specially developed for high and low rise locations where high winds are a significant risk. Special open weave reduces the pressure build up on the Scaffolding structure in high winds. Reduces heat build-up during summer months. A low cost solution that combines protection with containment.

UV resistant. Suitable for DigiWrap printing.

Tested to all relevant BS Codes and LPS 1215 standard for fire resistant scaffold sheeting.

Material: Open weave Flame retardant polypropylene.

Colour: White Thickness 0.75mm

Light transmission: 35%

Air permeability:

Dense weave 165mm/sec (approx 72% of sheet)

Open weave 577mm/sec (approx 28% of sheet)

Roll size/weight: 2m x 45m / 14.9Kg

UV resistant. Suitable for DigiWrap printing.

High performance cable ratchet ties provide reliable fixings very quickly, saving time and money on site.



Monarflex

A member of the Icopal Group



Temporary Roof Covering - TRC

With roof refurbishment, meticulous planning is required to ensure the project remains weather tight. Often conventional scaffold structures are not suited. TRC is the sheeting designed for the lightweight HAKI system.

Available in flame retardant and standard options

Material: Reinforced low density polyethylene

Colour: White: TRC Flamesafe, Clear: TRC

Use: Temporary roof cover


Reinforcement 1670 dtex 9 x 12 multi filament grid

Thickness 0.25mm

Roll size/weight:

3.35 x 50m / 54.55kg

3.35 x 30m / 30.00kg

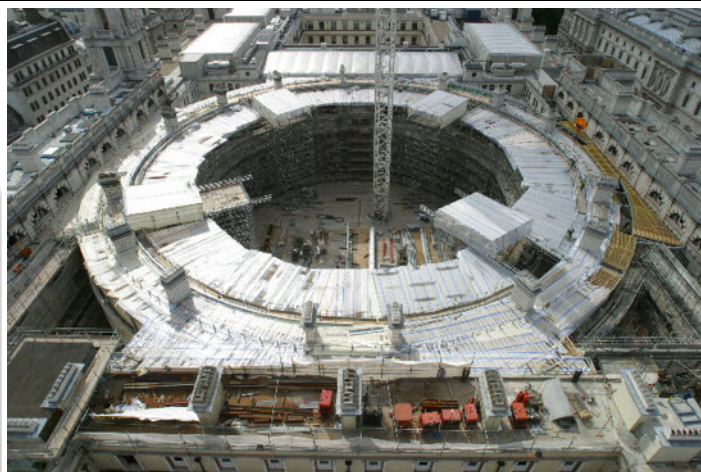



Print Solutions From 'The Blinking Lamp Company'

Whether you are designing, developing, redeveloping, letting or contracting on a building there has never been a quicker more cost effective way to release the huge marketing potential of its structure. The Blinking Lamp Company provides a wide range of fully printed containment products. Now giving you the opportunity to wrap any building in a powerful highly visible message, from simple banners featuring your logo to an all over full colour image providing a unique advertising opportunity in a 'super billboard' style.

Monarflex Digiwrap Airflow Flamesafe

Minimum order quantity 1 roll.

Roll sizes available 2m x 45m.

Products available:

- Airflow Flamesafe Vented sheet.
- Scaffband Flamesafe Scaffold sheeting.

Advertising can be site specific, dramatically enhancing the overall site appearance.

Digiwrap lead time 7 - 10 days from approved artwork and official order.

Printing option: 4 colour process will create any required image, up to the full 2m sheet width x 39m in length.



Above: Airflow Flamesafe Hallam printed at 1.4m high

Below: George Hotel printed at 2m high



Below: Airflow Flamesafe Berkeley Homes printed at 1.6m high





Monarflex Digiwrap Scaffband Flamesafe



Above: Scaffband Flamesafe Marshall
Printed at 1.6m high
Gap between each logo 2.5m



Right: Scaffband Flamesafe
Diamond Build PLC
Printed at 1.4m high
Gap between each logo 2.9m



Monarflex Digiwrap printing allows you to wrap any building in a powerful, highly visible message.

No minimum order value allows you to order one off promotion sheeting.

Monarflex Firesmart Digiwrap



Above: Firesmart Killby & Gayford
Printed at 600mm high x 5520mm length
Gap between each logo 1060mm

Minimum order quantity of 13 rolls applies (+/- up to 2 rolls)

Product available: Monarflex Firesmart.

Print a combination of digital images and logos on the same sheet

Full colour service for Images / photos

Roll size available 2m x 45m.

600mm or 1000mm high logo or picture repeated for a maximum length of 39mtrs (total sheet length is 45m which includes an unprinted 3mtr run in and 3mtr run out)

Advertising can be site specific, dramatically enhancing the overall site appearance

Firesmart Digiwrap lead time 7 - 10 days from approved artwork and official order.

RED BOOK LISTED



**Fully certified to LPS
1207 and 1215
standards**



Printed Tri-Flex FR Scaffold Sheeting



Above: Tri-Flex FR, McGee
Printed at 600mm high
Gap between each logo 100mm



LPS 1207
Cert No. 915b-x1/01



LPS 1215
Cert No. 915a-x1/01

Right: Tri-Flex FR, Telford Homes
Printed at 600mm high
Gap between each logo 100mm



Minimum order 100 rolls (+/- up to 10%)

Roll sizes available: 2m x 45m / 2.25m x 40m / 3m x 45m / 4m x 45m.

Product available: Tri-Flex, Tri-Flex FR & Tri-Flex HD FR.

Colour: Tri-Flex Clear, Tri-Flex FR & Tri-Flex HDFR White.

Tri-Flex FR & HDFR are fully certificated to LPS 1207 & LPS 1215

RED BOOK LISTED

Printed Tri-Flex Scaffold Sheeting



Minimum order 100 rolls (+/- up to 10%)

Printing option: 600mm high band, can be printed with up to four colours

Logo image repeats approximately every metre

Lead time is approximately 14 weeks



Left: Tri-Flex Countryside
Printed at 600mm
Gap between each logo 100mm



Tri-Screen Fence Panels



Minimum order: 1 panel

Panel size: 3.4m x 1.78m

Product available: Mesh vented PVC, hemmed & eyeleted

Colour: White base material can be overprinted as required

Printing option: 4 colour process, will create any required image. The full panel can be printed

Tri-Screen Fence Rolls



Minimum order: 50 rolls

Roll sizes available: 1.85m x 50m

Product available: Tri-Screen Fence Rolls vented debris netting

Colour: White

Printing option: 600mm high solid band, can be printed with up to three colours

Logo image repeats every metre

Ideally suited for site perimeter advertising on temporary fencing



Printed Monarflex Firesmart



Above: Firesmart Standard Life Investments Logo

Printed at 600mm high

Gap between each logo 100mm

Certificated by the BRE to LPBC standards LPS 1215 and LPS 1207

RED BOOK LISTED

Minimum order 50 rolls (+/- up to 10%)

Roll sizes available:

2m x 45m / 2.25m x 40m / 3m x 45m /
4m x 36m

Products available:

Monarflex Firesmart

Super T Plus

Colour:

Firesmart – White.

Super T Plus – Clear.

Lead time is approximately 6 weeks

Printing option:

600mm high band, can be printed with
up to four colours. Logo image repeats
approximately every metre.



Monarflex
A member of the Icopal Group



Printed Super T-Plus



Above: Super T Plus Kier Group Logo

Printed at 600mm high

Gap between each logo 100mm

Monarflex
A member of the Icopal Group



Monarflex
A member of the Icopal Group





LPS 1215 Certificated Debris Netting

Tri-Net FR, Flame Retardant Debris Netting

Fully certificated by the BRE to LPCB standard LPS 1215

new

Numerous companies are unwittingly using products that fail to meet their current insurance requirements.
Don't run the risk of uninsured losses. Always check your insurance requirements before proceeding.



Tri-Net FR Debris Netting is currently one of the few flame retardant products that fully meet the insurance industry requirements.

Red Book Listed - Certificates Available on Request.

BRE Certificated Number 909a/01



Tri-Net FR Technical Specification				
Material: Monofilament Polyetheylane		Fire retardant additive: Ethylenbistetrabromophthalimide / Antimony Oxide		
Weight: 80 gsm (Construction 18 x 24)		Tensile Strength: (Grabs Method) 40lbs - Warp 36lbs - Weft		
Colour: White (with 2 x 25mm red contrasting bands) FR identification as required by the BSI and BRE				
Roll size	Roll weight	Band of eyelets per roll	Position	Eyelets spacing
2m x 45m	8kg	3	Top Middle & Bottom	Every 70mm
3m x 45m	12kg	4	Top, 1m in, 1m on & Bottom	Every 70mm

Netting Ties

Netting Ties

4.8mm x 295mm (minimum strength 22.2kg)

Air-Flow Ties

7.6mm x 296mm (minimum strength 54.5kg)

Ladder Ties

12.7mm x 550mm (minimum strength 113.5kg)

Material: Nylon 66
Working Temperature: -40 to +85
UL Flammability Rating: UL94





Debris Netting




The Blinking Lamp Company carries one of the largest stocks and colours of fine mesh debris netting in the UK.

Scaffolding & Premium Grade


Roll Sizes 2m x 50m & 3m x 50m




Green



Blue



Black



Red



Yellow




Orange



White



F/R LPS White



F/R Blue

Knitted High Density Polyethylene Monofilament Construction incorporating black eyelet button holes, approximately 15cms apart. Wrapped in individual bags.

Designed to protect the public and traffic below from falling debris.

Allows air to pass through the netting, thus reducing the wind loading on scaffold structures compared to scaffold sheeting.



Shade \ Stage Netting



Stage Netting

Developed especially for the protection of open stands and stages. Flame retardant and reinforced along both edges.

Weight: 150gsm Shade Factor: 91%

Shade Netting

Offers excellent protection from the sun and wind. UV stabilised to give a longer life.

Weight: 150gsm Shade Factor: 72%



Personal Man Safety Nets



Manufactured to the very latest European Standard.

BS EN1263-1: 2002 Safety Net System S

Base Net Class A2

4.5mm Black PP Net

100mm square mesh

Tested to ISO1806

Strength: 2390n

Border Rope

14mm White & Blue Sisal

Min: 30kn Breaking strength

Tie Rope

13mm White Nylon Rope

Min: 30kn Breaking strength

Overlay Nets



Designed to catch tools and other equipment from falling through the personal man safety net and injuring anyone below.

Manufactured from high density polyethylene monofilament and stitched into the safety net by the use of netting ties.

Available in a range of colours: ● ● ● ● ● ● ● ●

Available in standard and flame retardant.

Drop Nets



Designed to be used with primary concrete slab construction, fixed to the floor and ceiling to stop materials from falling and being blown over the side.

Base Net

4.5mm twisted 3 strand Polypropylene

40mm or 50mm square mesh

Border Rope: 8mm braided nylon

Both available in Black, Blue, White and Green

Can also be manufactured in Flame Retardant, tested to BS 5857 Part 2 1980

Line Crossing Nets



Constructed from braided Polypropylene, which is an outstanding electrical insulator, especially with high frequency currents and is chemically inert.

Base Net

4.5mm Black Polypropylene - 300mm square mesh

Strength 2390n - Tested to ISO1806

Border Rope: 8mm braided white nylon

Strength 1100kg




Personal Fall Protection Equipment

The Blinking Lamp Company is one of the country's leading suppliers of full arrest safety harnesses to the construction industry. We stock a very comprehensive range of the leading brands. The products shown here are the most popular currently in use. However the complete range of Miller, Pammenter & Petrie, Checkmate and Ridgegear harnesses are available on request.

Duraflex Stretch Harnesses



Hi-Vis 'Duraflex'
Vest Harness



Greater Comfort

'Duraflex' harnesses conform to the shape of the worker, stretching with every movement.

No binding or kinking.

Improved Safety

A comfortable harness is more likely to be worn properly, enhancing compliance and safety on the jobsite.

Increased Durability

TEFLON high-tech protective finish repels water, oil, grease and dirt.

Extends the life of the harness.



2 Point
'Duraflex'
Harness

MILLER
by SPERIAN



Barracuda Manyard

Combines a unique vertical anchorage clamp with a fall arrest lanyard in one compact unit. It is the only practical fall arrest system for vertical scaffolding tubes and significantly enhances the safety of workers erecting, dismantling and altering scaffolding.

Revolution 'Duraflex' Harness

The Revolution harness with Duraflex webbing is the most comfortable on the market. The patented elasticated webbing and rotating PivotLink connections at the waist allow full freedom of movement for crouching down or moving around the work site.

Features

Cam Shoulder Strap Adjusters
ErgoArmor Back Shield
EasyFit leg buckles
Self contained label pack





Miller Harness Kits



Miller Kit 7

1 point Titan harness

Lanyard c/w energy absorber
and carry case



Miller Kit 8

1 point DuraFlex harness

Lanyard c/w energy absorber
and carry case



Miller Kit 11

1 or 2 point DuraFlex harness

2m Elasticated Manyard and
back pack

Lanyards & Personal Fall Limiters



Lanyard

2m lanyard complete with energy
absorber, scaffold hook and
galvanised connector.



Twin Tails Lanyard

2 x 2m lanyard complete with
energy absorber, 2 scaffold hooks
and galvanised connectors.



Manyard

1.5m or 2m complete with
scaffold hook and galvanised
connector with TEFLON finish.



Turbolite

Cost effective and affordable
alternative to shock absorbing
lanyards. High strength, impact
resistant nylon housing for
maximum durability.

Features

Compact & Lightweight

Ideal for low level work

Rated up to 181.4kg

Weight 0.86kg

Length 1.8m



Scorpion

Self retracting block with
quick-activating braking
system that limits a free fall
to centimetres, with reduced
fall arrest forces.

Features

Robust & Lightweight

PFL fall indicator

Stainless steel / Alum Body

Weight 1.6kg

Length 2.8m



Lifelines

Falcon self-retracting lifeline

The safest, most robust and comprehensive range of composite retractable lifelines on the market.

6.2m, 10m, 15m and 20m models available.

Stainless steel or galvanised wire cable

CE certified and conforms to EN360

Lifetime housing guarantee



New 6m Webbing Lifeline

Instant fall arrest

Compact & lightweight

Only weighs 1.5kg

Built in energy absorber

Aramid fiber webbing



Serpent Temporary Horizontal Lifeline

Durable braided rope with 2 galvanised connectors, supplied with two 1.5m webbing anchorage slings.

Complies to EN795b



Jordan Clamp

The Jordan Safety Clamp is a simple cost effective safety device that enables the scaffolder to hook up to a fail safe security point as soon as he leaves ground level (or after all levels above the first lift). The scaffolder is secure at all times but has freedom of movement, and can add or remove scaffolding components without unclipping the safety lanyard.



Harness Inspections... Are you checking yours ???

Under The Working at Height Regulation 2005 (WAHR) it is a legal requirement that all your personal fall protection equipment which is exposed to conditions causing serious deterioration, should be inspected at suitable intervals and each time exceptional circumstances which might jeopardise safety have occurred.

The HSE state that this should be done at least every 6 months and in cases of extensive use they recommend a check every 3 months.

Our National sales force are fully trained to inspect all your fall protection equipment

Anchor devices

A Lifelines, Steel straps, Scaffold hooks and Webbing anchorage slings.

Full Body Harness

B All types and makes of harnesses.

Connecting Devices

C Shock absorbing & restraint lanyards, self retracting lifelines and fall limiters

We also offer Tool box Talks on fall protection techniques and harness fitting.





Pammenter & Petrie

Pammenter & Petrie offer a full range of full body harnesses for fall arrest, rescue, work positioning, restraint and suspended access. The products shown are the most popular products currently in use.



2020 'Lastic' Harness

2 point fall arrest harness, with 3 side bar and rectangular link, leg and chest connectors. Polyester webbing with elasticated leg straps. carbon steel, heat treated and zinc plated metal fitting.

EN361:2004



Scaffolders 2000 Kit

1 point, fall arrest harness, with 3 bar slide and rectangular link, leg and chest connections, complete with integral 2m fall arrest lanyard. Polyester webbing with powder coated steel metal fittings

EN361:2004



Chunkie Stretch Lanyard

2m polyester elasticated stretch webbing with a rip stitch energy absorber, complete with scaffold hook.



Chunkie Stretch Two Tails Lanyard

2m polyester elasticated stretch webbing with a rip stitch energy absorber in a PVC shrink sleeve, complete with scaffold hooks.



Restraints Lanyard (1m, 1.5m & 2m)

32mm Polyester webbing steel captive screwgate karabiners at each end.



Gotcha Rescue Kit

This kit will enable the rescuer to attach a casualty who is suspended by a fall arrest lanyard, raise the casualty in order to release their current attachment and then raise or lower the casualty to a point of safety. Available with 50m, 100m, 150m or 200m of rope.



Fall Arrest Harness

Single point with 3 bar slide and rectangular leg link.



Chunkie Rope Lanyard

1.75m, complete with scaffold hook. Incorporating an energy absorbing pack.

Training

Both Miller and P&P offer a comprehensive range of training packages. Basic harness, equipment inspection & rescue from height. These are just a few of what both companies can offer you.

Training and development can be as, if not more important than the equipment you use.





Checkmate



CHECKMATE
LIFTING &
SAFETY

Checkmate is a unique, privately owned and dynamic business with a proud history which has now established itself as a leader in its chosen fields. Well into its fourth decade Checkmate is still very much a family business with four key trading divisions: Safety, Lifting, Flexible Engineering and Energy.

From the ground up, Checkmate is built around a "SAFE" ethos, from conception of design, our business culture and ultimate user safety. We are proud to be world leaders in our chosen fields and our aim is to continuously raise the benchmark.



**Checkmate 3mtr
Fall arrest Block
with Snap Hook
and Screw Gate
Caribina**



Rigger 5 Point

Checkmate Rigger 5 Point Quick release Clip Harness with comfort Pad shoulders



**Checkmate escape
Descender 2 Man**



**Checkmate 18mtr
Fall Arrest Block with
Carry Strap**



**Checkmate 20mtr Horizontal
Lifeline with Scaffold Hooks
complete with carry holdall**



**Checkmate 25mtr Horizontal Life
Line in Carry Holdall designed for
up to 4 persons**



**Checkmate 20mtr Temporary
Lifeline in Carry Holdall and
Scaffold Clip Attachment**



Ridgegear



Ridgegear is a international company established to provide the highest quality, innovative and practical solutions to the Height Safety industry. We not only manufacture the finished height safety product, including harnesses, lanyards and fall arrest blocks but also the critical safety components supported by the necessary expertise to solve all your safety at height problems. Ridgegear has proven expertise in harnesses and fall protection engineering and is leading the design of the next generation of fall protection solutions.



RGH1 Harness

RGH1 Harness EN361 Water Repellent Rear Anchor Point and Rip Stitch Indicator



RGH3 Harness

RGH3 Harness Water Repellent Rear and side anchor point and Rip Stitch Indicator



RGH4 Harness

RGH4 EN361 and 358 Water



RGH11 Harness

RGH11 EN 358 and 361 Multi Function Harness Front and Rear Anchor points and work position D rings



RGH16 Harness

RGH16 EN 358, 361 and 813 Multi Task Harness Ventral D Sit Suspension Quick connect Buckles and Gear Loops



RGH18 Harness

RGH18 Fully Elasticated Harness Rear attachment With Rip Stitch Indicator



Ridgegear



**RGA1 Retractable
Mini Webbing Block
2.5mtr**



**RGA3 Excalibur
3mtr fall arrest
block the ultimate
in low level working**



RGA4

RGA4 15mtr 3 way
retrieval block



RGH8

RGH8 Multi Purpose Fall Arrest
Block with auto descender



RGA9

RGA9 Three way Retrieval Fall
arrest block 33mtr EN360



RGHL1 Harness

RGHL1 Horizontal Temporary Lifeline EN 795
Available in Both 10 and 20mtr



RGK42 Trauma Suspension Straps

RGK42 Trauma Suspension Straps



Printed Banners



Our scaffolding banners are made from extremely tough reinforced PVC with sleeves top and bottom to take the scaffold poles. White PVC banners are manufactured with a blackout film between the two layers to eliminate the other side showing through making this ideal for double sided banners. Traditional scaffolding banners are 40"x 44" providing an area of 3 square feet. However we are able to provide banners from any size to full building wraps.

PVC base colours available: ● ● ● ● ● ●


Signs

Standard or bespoke signs are available in a range of materials, colours and sizes to meet all of your on or off site requirements. The following are just an example of the range of signs we supply. For bespoke signs all you need to do is confirm the details you require printed, confirm the size, colours and quantity you are looking for. Subject to your chosen material we will confirm the minimum production run, cost and earliest despatch date before proceeding with your order.



These images are just a few examples of the large range of signs supplied by us. Contact us for more details.

Scaffold Lamps

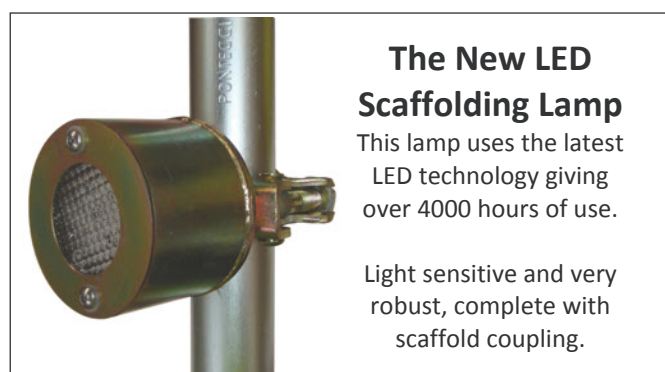



Safety Products



Tube End Caps

Application

To protect the building fabric and the public from damage and injury from exposed tube.

Colours

Yellow, Blue, Sky-Blue, Red, Black, White Orange & Green



Internal Tube Caps

(Hi-Vis Yellow)



Fitting Thread Caps

(Yellow & Blue)



Cubby Caps

(Hi-Vis Yellow)

Super Seal Plug 2, is the 'New' revolutionary safety solution.

new

- The SSP2 Cap will form a complete inner seal of the scaffold tube.
- Ideal for use in contaminated / wet areas. Small end cap will seal the end of the SSP2.
- Will stop cross contamination in food processing, pharmaceutical production and many other highly sensitive areas, by keeping any residue or contaminants inside the tubes.
- Transponders can be easily fitted, for tracking movement of tubes (e.g. Nuclear power stations, or other highly controlled areas).
- Removes the potential of foreign objects entering the tube.
- Fully removable & reusable.
- Fully compatible with the use of base plates.
- Can be easily positioned at a depth that allows it to be used with a joint pin.
- Inserting the SSP2 is fast, and can be safely installed with a simple hand tool, or small power drill.
- Easy to fit in stacks of tube, even if they are not all flush, allowing a perfect fit every time.
- Tamper proof, removable with a special tool.
- Reduces the risk of hand / eye injuries caused by inserting current versions with hammers.
- When erecting scaffolding on jetties or other structures that are submerged by tidal waters, the SSP2 will stop the inside of the tubes from silting up. When the scaffold is dismantled there will be no manual handling problems with the excess weight, also removing the need to clean out the inside of the tubes.





Safety Products



Self Adhesive Tapes

Red & White or Yellow & Black
Roll Size: 50mm x 33m



Scaffold Sleeving

Red & White or Yellow & Black
Roll Size: 500m



Barrier Tapes

Red & White or Yellow & Black
Roll Size: 75mm x 500m



Easy Grip Hi-Vis Tube Cover

These plastic sleeves simply fit around any scaffold tubes in seconds and are 100% reusable.
(600mm length)




Red or Yellow Padded Sleeving

Foam padded sleeving gives a highly visible hazard warning. Easy to cut & dress around all tube & fitting protrusions. For use in all pedestrian thoroughfares & safe site environments. Provides added protection against potentially expensive personal injury & legal claims.
(Available in 2m lengths)



Glo Coat

High Visibility 100% Polyester with 3 reflective bands. Machine washable. Zip Fastening.
(145cm in length)
Customer Branded Options

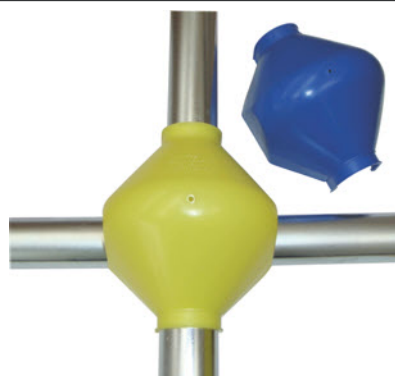

Armadillo

Scaffold fitting cover
Available in Yellow or Blue



Footplate

(Packed in 50's)



Tubtrug

Available in Small (14L) Medium (26L) or Large (38L) and in various colours. Frost and UV proof.



Scafftag Products



Scafftag is a complete scaffold management system comprising durable, high visibility weatherproof holders and inserts, fits all standard scaffolding tube.

Internationally used and recognised as the safety system to assist with the control of scaffolding from first build to dismantle.

Supplied by the Box: 10 Holders, 20 Inserts and 2 Pens



SCAFFTAG®

VERY LIGHT DUTY
use only

FOR INSPECTION PURPOSES ONLY
ONE MAN, NO LOADS
7.5 kN/m²
150kg / sq. foot

REF No. _____
LOCATION _____
DATE ERECTED _____

If last inspection exceeds 7 days,
remove insert and inform supervisor

DATE	TIME	SIGNATURE

CAUTION
THE FOLLOWING HAZARDS
SHOULD BE NOTED

SCAFFTAG®

LIGHT DUTY
use only

FOR INSPECTION PURPOSES ONLY
ONE MAN, NO LOADS
1.5 kN/m²
30 kN/m² / sq. foot

REF No. _____
LOCATION _____
DATE ERECTED _____

If last inspection exceeds 7 days,
remove insert and inform supervisor

DATE	TIME	SIGNATURE

CAUTION
THE FOLLOWING HAZARDS
SHOULD BE NOTED

SCAFFTAG®

HEAVY DUTY
use only

FOR INSPECTION PURPOSES ONLY
ONE MAN, NO LOADS
2.5 kN/m²
50 kN/m² / sq. foot

REF No. _____
LOCATION _____
DATE ERECTED _____

If last inspection exceeds 7 days,
remove insert and inform supervisor

DATE	TIME	SIGNATURE

CAUTION
THE FOLLOWING HAZARDS
SHOULD BE NOTED

SCAFFTAG®

SPECIAL PURPOSE
CONSTRUCTED FOR SPECIAL USE
USE OR LIMITATIONS

LOADING OR RESTRICTIONS

REF No. _____
LOCATION _____
DATE ERECTED _____

If last inspection exceeds 7 days,
remove insert and inform supervisor

DATE	TIME	SIGNATURE

CAUTION
THE FOLLOWING HAZARDS
SHOULD BE NOTED

SCAFFTAG®

WARNING
UNLAWFUL REMOVAL OR INTERFERENCE
WITH THIS SIGN COULD MAKE YOU LIABLE
TO PROSECUTION AND FINES

TO BE COMPLETED BY INSPECTOR
BEFORE BEING TAKEN INTO USE
FOR THE FIRST TIME

INSPECTOR'S NAME & SIGNATURE

DATE & TIME

TO BE COMPLETED BY SUPERVISOR
REQUESTED BY

BUILT BY

DATE

SIGNATURE

DECOMMISSIONED DATE

ANY QUERIES REGARDING THIS
STRUCTURE SHOULD BE MADE
BY CONTACTING

NAME

TEL

© Copyright Scafftag Ltd. 2005
TEL: +44 (0) 1442 721212 FAX: 0176 448
www.scafftag.com

SCAFFTAG®

SCAFFOLDING HAND OVER CERTIFICATE

Completion Date

Site

Description of work

Number of

During this
work

Scaffolding as detailed above has been inspected and
checked with requirements of all current legislation & regulations.
It is absolutely sound and should be used and loaded in
accordance with the Certificate No.

If no inspection is required, then only for

As building to be
dismantled last of

The requirements of the Regulations with regard to working
platforms, guardrails and toeboards, have been complied with.
The scaffolding is in place.

This scaffolding must be inspected at intervals not exceeding 7
days when the last inspection or following exposure to weather
conditions likely to have affected its strength or stability, or
following substantial addition, dismantling or other alteration to
the work, and the inspection recorded. This inspection to confirm
that the scaffolding complies with the Regulations.

It is the responsibility of every employer, who uses the scaffold, to
ensure that the requirements of the Regulations are complied with.

Note: Tagging should be on other work safety must not be used to
scaffold unless it has been specifically designed for such work.

Scaffolder's Signature

Client's Signature

Contact Tel No.

1 of 1

© Copyright Scafftag Ltd. 2005



Laddertag

The original, industry leading ladder tagging solution to help eliminate accidents and improve the inspection management processes.

Supplied by the Box: 10 Holders, 10 Inserts and 1 Pen.



Nanotag

Specifically designed system for fall arrest equipment to comply with latest legislation and good practices.

Supplied by the Box:
20 Holders (Inserts & key rings
sold separately)



Safetrak

Scafftags **NEW** electronic management system. This unique, customisable electronic system, brings equipment status management to your desktop.

Full details are available on request.



Site Consumables



Flame Retardant Polythene

From 250mu to 1200mu
Roll Sizes 2m x 25m



Polythene Sheeting

800 to 1000 gauge
Roll Sizes 2m x 25m
or 4m x 25m



Lay Flat Scaffold Board Sheeting

Suitable for asbestos removal
and the food hygiene industry

**Our polythene is available in a range of sizes, colours and gauges.
Flame retardant and standard. Bespoke sizes and gauges by special order.**



Heavy Duty Fitting Bags

One of the strongest of its kind.
Designed with hard work in mind.
Manufactured from tough woven
polypropylene. 4 ply reinforced
base for extra strength.

**Independently tested
Marked SWL 30kg**



Standard Fitting Bags




Manufactured from woven
polypropylene.

1 Tonne Bulk Bags



Manufactured from tough
woven polypropylene.
4 lifting loops that are stitched
into the fabric of the
bag for extra strength.
Available with a liner.

Barrier Fencing

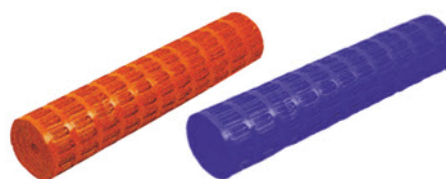

Colours available: Orange & Blue
Roll Size: 1m x 50m
Material: HDPE
Mesh Size: 140mm x 50mm
Weight: 160gsm (8kg per roll)

Uses
Construction works,
temporary road
works, car parks,
show grounds and
sporting events.

Rope

Blue Polypropylene
6mm, 10mm, & 18mm
Sisal 18mm

Supplied in 220m coils

Blue Polypropylene
6mm x 500m drum

**Both 18mm ropes are fully
Certificated**



Gin Wheels

Fully Certified
Marked SWL 250kg
Tested to BS1692





Tools & Equipment



**Poka
Handle**



**Chunky
Handle**



**Flat
Handle**



**Thin Round
Handle**



**Scaffold
Spanner
Lanyard**

Our Scaffold Spanners are second to none

You have a choice of 4 different handles

Poka, Chunky, Flat & Thin Round

4 different materials

Zinc Plated, Stainless Steel, Aluminum & Titanium

Not forgetting 2 different heads

Hex or Bi-Hex

Aluminum spanners come with a stainless steel head

Titanium spanners are full titanium (Handle & Head)



**Friction fit fastener for a
super flush finish**



Bi-Hex



Hex

Handle Style	Zinc Plated	Stainless Steel	Aluminium	Titanium
Poka	Yes	Yes	Yes	Yes
Chunky	Yes	Yes	Yes	Yes
Flat	No	Yes	Yes	Yes
Thin Round	No	Yes	Yes	Yes



Tools & Equipment



**Our leather goods are designed with hard work in mind.
Made from top quality leather**



**Double
Frog**



**Single
Frog**



**Tape
Holder**



**Mobile
Holder**



**Short
Level
Holder**



**Long
Level
Holder**

Steel Flush Ratchet with Podger Handle



19mm / 21mm or 17mm / 21mm

Podger Hammer



Stabila Rare Earth Magnetic Level



**Giant
Tape Measure**

Plastic casing with robust
rubber grip cover.


Length 5m / 16ft.

Blade width 19mm.
Cm with mm
Graduation.

Lock & Pause Button.



Step Ups, Ladder Gates and Traps

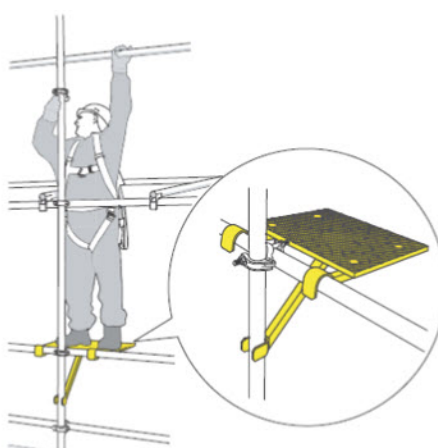

Step Up

The step-up device is a step system designed to provide the scaffolder with fall protection from the ledger above the place of work while installing the handrail for the next lift. This means that the scaffolder can erect and dismantle the scaffold safely while being protected by a guardrail which itself becomes part of the finished scaffold structure.

The step-up system is generally used with two employees working together, particularly on longer facades.

Step-up Traditional designed for use with traditional tube & fittings.

Step-up System designed for use with system scaffolding

Both versions are load tested to **5KN**.

new



Ladder Safety Access Trap

SWL: 1.5Kn / M2

Platform: 2.0mm CR4 Mild steel sheet

Fixing Frame: 30.0mm x 6.0mm Flat steel

Application

To prevent injury from falling through the ladder access for anyone working on the scaffolding.

Benefits

Easy installation.

Saving time and money.

Ladder Gates

Reversible closing steel framed gates.

Spring or Gravity Closure.

1m high, approx 10kg

Mesh with toeboard infill.

Application

Prevents falls from height in ladder access areas where handrails are absent.

Benefits

Quick and easy to install.





Skip Products



**Standard
Skip Lamp**



Heavy Duty Skip Lamp
With security a/key



Heavy Duty Skip Lamp
With Padlock



LED Skip Lamp
With security a/key

All of our cages come supplied with a light sensitive lamp and battery



Skip Nets

Available in
12ft x 9ft
15ft x 9ft
18ft x 10ft
24ft x 12ft

Manufactured from Heavy Duty Net.

Double stitched hems with eyelets.

Marker Boards



Sizes available

700mm x 140mm
375mm x 265mm
420mm x 235mm

Aluminium or self adhesive

Conforms to BS AU152

Supplied in pairs

Road Cones

Available in

45cm, 53cm, 60cm, 75cm and 1 metre.

One piece self weighted
with DES 2 sleeve.

Traditional hexagonal base design.



6v 996 Battery



Microlite

Light sensitive
single battery lamp.

Polycarbonate lens.

Conforms to

BS3143 PTS.





Roofing Membranes

Tyvek® Supro

Tyvek® Supro is an extremely water resistant, airtight and vapour permeable membrane providing superior air and moisture management for commercial and residential buildings.

Tyvek® Supro is a multi-purpose, durable and reinforced Tyvek® grade for use in all supported and unsupported pitched roof applications, including warm, hybrid and cold roofs.

Also suitable for Scottish sarking board systems and low pitched metal roofs as well as wall and floor applications.



Composition	Composite of High Density Polyethylene and Polypropylene	
Roll Size	1.5m x 50m	1m x 50m
Roll Weight	12kg	8.5kg
Mass per unit area	145 gr /m2	
UV Exposure	4 months	
Product / Functional layer thickness	450 / 220 mm	
Water vapour resistance (Sd)	0.03m	
CE marking	Yes	

DuPont™
Tyvek®



iab
Bord Agrément na hÉireann
Irish Agrément Board

Ultra Breather

Ultra is a 3-layer low resistance vapour permeable air barrier roofing underlay for pitched roof construction. Ultra is suitable for fully supported or unsupported applications and can be utilised in conventional ventilated roof constructions.


Ultra has the added advantage of being suitable for use in unventilated roofing applications, and is accredited via BBA Certificate 06/4334 and IAB Certificate 06/0237.



Roll Size	1.5m x 50m	1m x 50m
Roll Weight	9kg	6kg
Mass per unit area	112 gr /m2	
Thickness	0.44mm	
Water vapour resistance (Sd)	0.037m	
Tear Resistance	Machine 130n	Cross 120n



Vapour and Gas Barriers

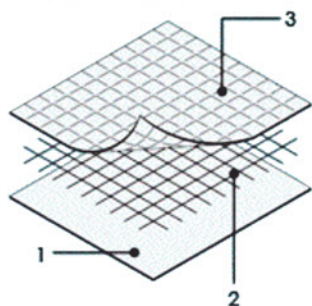


- 1 BLOWN LD POLYETHYLENE
- 2 HDPE REINFORCING GRID
- 3 EXTRUDED LD POLYETHYLENE

Vapour Control Layer

A reinforced polyethylene membrane for use in buildings with low to medium humidity. Particularly recommended for bathrooms and kitchens. Suitable for use in cold and warm pitched roofs or vertically applied as part of a curtain wall cladding system.

Roll Size	2m x 50m
Tensile Strength	5.7 KN/m
Water Vapour Resistance	554 MNS /g
Weight	260gsm
Colour	Clear with a blue tint
Tested to the NEW	EN 1931

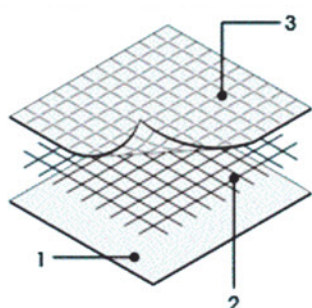


- 1 BLOWN LD POLYETHYLENE
- 2 HDPE REINFORCING GRID
- 3 EXTRUDED LD POLYETHYLENE

Vapour Check Layer

A reinforced polyethylene membrane for use in buildings with low to medium humidity. Suitable for use in cold and warm pitched roofs or vertically applied as a part of a curtain wall cladding system.

Roll Size	2m x 50m	4m x 25m
Tensile Strength	7.2 KN/m / B25.6 KN/m	
Water Vapour Resistance		
Weight	190gsm	
Colour	Clear with a blue tint	
Tested to the NEW	EN 1931	

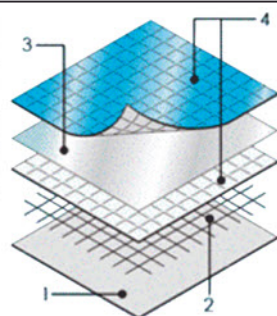


- 1 BLOWN LD POLYETHYLENE
- 2 PP REINFORCING GRID
- 3 ALUMINIUM FOIL
- 4 EXTRUDED LD POLYETHYLENE

High Performance VCL

For use in buildings with high humidity including sports halls, swimming pools and leisure centres. Tri-Foil is a multi layer membrane of polyethylene, woven polyethylene reinforcing and aluminium foil for exceptional water resistance.

Roll Size	2m x 50m
Tensile Strength	7.37 KN/m
Water Vapour Resistance	20,600 MNS / g
Weight	320gsm
Colour	Clear with a blue tint
Tested to the NEW	EN 1931

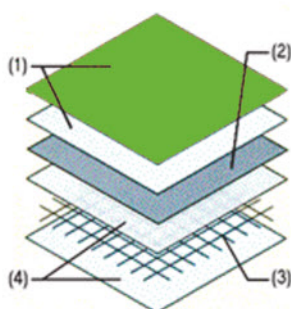

- 1 EXTRUDED LD POLYETHYLENE
- 2 ALUMINIUM FOIL
- 3 POLYPROP REINFORCING GRID
- 4 GREY LD POLYETHYLENE

300 Methane Barrier

Tri-Thane 300 is suitable as a radon and methane barrier, and as a damp proof membrane in floor construction. It can be installed under or over concrete ground floor slabs with or without insulation. It can also be used for remedial work and with timber or concrete suspended floors.

Roll Size	2m x 50m
Tensile Strength (Along\Across)	9.1 KN/m / 8.9 KN/m
Radeon Permeability	2.3 (10 -12 m2 s-1)
Methane Permeability	Less than 0.001 cc/m2/day
Colour \ Weight	Grey / 353gsm
Tested to the NEW	EN 1931




Roofing Products

EavesGuard Protection System

EavesGuard provides a maintenance free drip into the gutter and an underlay support. It is ideal for use with underlays used as felt alternatives which are not suitable for forming gutter drips.

Also used in refurbishment to replace rotted felt at the eaves.

1.5mm gauge PVC-U.

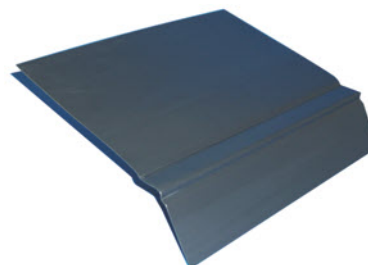

Tri-Bond High Performance Sealant Tape

High performance double sided sealant tape for use with vapour control layers & damp proof membranes.

Roll Sizes

15mm x 22.5m

30mm x 22.5m

50mm x 15m

70mm x 20m



Monarflex FormFlash



FormFlash is a waterproof flashing material designed to replace traditional lead flashing.

FormFlash can be installed in all applications where traditional lead would be used.

Monarflex
A member of the Icopal Group



Securpulley

Securpulley has a patented design that eliminates the risk of falling suspended loads.

Exclusive braking system that locks the lifted load if the rope is released by the operator.

Securpulley is the only pulley for the building industry that conforms to the safety requirements of the machinery directive EEC 89/392, as indicated by the 'CE' mark.



Gaffa Tape




Colours: White, Silver and Black.

Roll size: 50mm x 50m

Roll size: 75mm x 50m

Roll size: 100mm x 50m

Top Hats

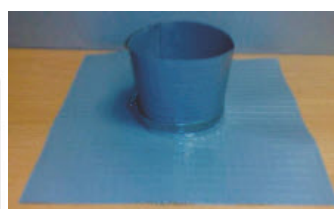

Top Hat Sections manufactured from strong robust RAC membrane.

Standard sizes are available from 50mm to 300mm.

Further bespoke sizes are available upon request.



Work Wear & Safety

Top to toe safety provider

Our featured core range products have been carefully selected, offering high quality fully compliant safety wear. Our mission is to uncomplicate a never ending variety. However we do appreciate not all projects are the same, so please contact us to enquire about any specific requirements you may have.



Head Protection

Invincible MK2 Surveyor Short Peak Helmet

A short peak helmet designed so that the wearer's field of vision is unimpeded. Conforms to EN397, ANSI Z89.

Colours: White, Yellow, Green, Blue, Red and Orange.



MK7 Standard Peak, Ventilated, Wheel Ratchet Helmet without Retractable Spec

All the advanced features of the MK7, for people who prefer to wear separate eye protection.

Colours: White, Yellow, Green, Blue, Red and Orange.



Headmaster Safety Helmet

Entry level helmet, conforms to EN 397. It is ideal for visitors where short term protection is required. It is also ideal for keeping costs down whilst still conforming to Health and Safety requirements.

Colours: White, Yellow, Green, Blue, Red and Orange.



Surefit Thruxton Visor Carrier c/w 20cm Polycarbonate Unbound Visor to fit MK2 Helmet

Offers protection against medium energy high speed particles at 120 m/s (270 mph), liquid droplets and molten metal. The optical qualities of the visor comply with the requirements of optical class 1 (highest).

Markings: EN166 1.B.3.9



Surefit Thruxton Helmet Mounted Ear Defenders to fit MK2 Helmet

Surefit™ Ear Defenders. Fit securely to JSP helmets with stand-off positioning. H=31 M=23 L=16 SNR=26 EN352-3. N.B. For use with MK2/3 helmets.





Head Protection

Surefit Contour Visor Carrier c/w 20cm Polycarbonate Unbound Visor to fit MK7 Helmet

Surefit™ Safety Visor. Visor carrier clips into ear defender housing and fits both standard and short peak helmets. Supplied fitted with polycarbonate visor.



Surefit Contour Helmet Mounted Ear Defenders to fit MK7 Helmet

Redesigned for added long term comfort and increased protection. Easy to attach and detach with spring loaded arms that give an excellent fit to the ear. When not in use the arms allow the cups to stand off clearly from the head. SNR 28.



Elasticated Chin Strap

When fitted to JSP industrial safety helmets, meets the requirements of EN397. When fitted to JSP industrial bump caps, meets the requirements of EN812.



Deluxe Chin Strap With Chin Cup

Deluxe wide elastic chin strap with chin cup, releases automatically with forces between 150 and 250 newtons.



We understand how important corporate image is in today's marketplace, and believe that there is no simpler or more effective way to promote a company name, logo or slogan than with the visual impact of a logo on a safety helmet or other safety product. JSP helmets and other safety products are specifically designed to allow for a large area for printing a company name or logo from artwork supplied.



MK8 EVOLUTION™

new

3X STRONGER THAN ANY OTHER INDUSTRIAL SAFETY HELMET IN THE WORLD

HEAD PROTECTION HAS EVOLVED

The MK8 Evolution™ is the only industrial safety helmet in the world meeting and exceeding the new far tougher head protection standard EN14052. The new EN14052 standard requires the helmet to withstand forces over 3 times the crown impact level of those in the old EN397 standard and for the first time provide protection from side impacts to the same level as forces experienced on the crown impact test of EN397!!! It is the biggest step forward in head protection since the old British Standards came into force in the 1970's which later formed into the EN397 standard.



VENTILATION OPTION

Ventilation convects hot air out and draws in cool air, reducing helmet temperatures by an average 2-3 degrees.



Eye Protection

Cyber Spectacle - blue\clear

Scratch resistant with wraparound single piece lens, soft nose bridge. Duo-flex side arms with soft grip pads hold the spectacle comfortably in place. Conforms to EN166 1 F.



Forceflex

Sports style comfortable glasses. Fully flexible TPU frame is capable of recovering from almost any deformation. ForceFlex technology cushions and absorbs impact, such as being dropped and/or stood on. Exceeds EN166F by over 6 times.



Cyber Spectacle - blue\silver anti mist

Scratch resistant with wraparound single piece lens, soft nose bridge. Duo-flex side arms with soft grip pads hold the spectacle comfortably in place. Conforms to EN166 1 F.



Stealth 7000 Yellow

Modern lightweight frameless single lens spectacle. The wraparound design complete with integral side shields allows for a wide, clear field of vision. Conforms to EN166 1 F.



Visispec Spectacle

A good all round safety spectacle with excellent value for money. Clear Polycarbonate anti-scratch lenses doubles as a visitor spectacle. Conforms to EN 166.1.F.



Alpine Overspec

Ideal to be used as an overspectacle. Lightweight with cord attachment point. Conforms to EN166 1 F.



Caspian Goggle

Close fitting, ski type goggle, offering protection against dust, liquid and molten metal. Conforms to EN1.B.3.4.9.



Martcare Impact Goggle

A compact and lightweight goggle. Tough Polycarbonate lens offers high resistance to impact from flying particles. Vented body, cost effective, PVC frame, Polycarbonate lens. Conforms to EN 166.1.B.



Martcare Anti-Mist Dust and Liquid Goggle

Polycarbonate lens and body offer protection against medium energy high-speed particles at 120 m/s (270 mph). The optical qualities of the lens comply with the requirements of optical class 1. The body offers protection against large dust particles, liquid droplets and molten metal. This version of the goggle is available with a lens that offers protection against molten metal and has been treated with an anti-mist coating. Meets the requirements of EN 166 1.B.3.4.





Hearing Protection

J Muff - Blue

Popular ear defender, suitable for light industrial duty and outdoor construction.

H=28 M=21 L=13 SNR=24 Conforms to EN 352-1.



J Muff - Yellow

Popular ear defender, suitable for light industrial duty and outdoor construction.

H=28 M=21 L=13 SNR=24 Conforms to EN 352-1.



Big Blue Ear Defender

Quality ear defenders, suitable for use in medium duty industrial and outdoor applications. Soft, wide foam cushions for all day comfort - ideal for long shifts. Over the Head H=33 M=27 L=18 SNR=30 Behind the Head H=31 M=23 L=16 SNR=26 Conforms to EN 352-1.



PU Foam Soundstopper

Self-adjusting to minimise pressure on the ear canal and to maximise noise protection. Also available corded. H=36 M=34 L=33 SNR=37 Conforms to EN 352-2.



Respiratory

FFP1

The FFP1 is a traditionally designed mask without a valve. Offering protection from solid and liquid aerosol variants. Conforms to EN149: 2001 FFP1.



Martcare Fold Flat Mask - FFP2

Offers an assigned protection factor (APF) of 10 x Workplace Exposure Limit (WEL) for fine non-toxic dusts, fumes and mists.



Martcare Fold Flat Mask - FFP2 - Valved

Offers an assigned protection factor (APF) of 10 x Workplace Exposure Limit (WEL) for fine non-toxic dusts, fumes and mists.





Leisure & Work Wear

New Product
Range

Regatta is one of the UK's leading outdoor clothing brands and has an outstanding reputation for providing quality and value for money. Whether it is waterproof and water repellent jackets, fleeces, trousers, footwear or rucksacks, Regatta has everything you need for all weathers.

Regatta
GREAT OUTDOORS®

Jackets



Benson II Jackets

Waterproof, windproof and breathable Isotex coated fabric.



Taped seams, mesh lined upper body, concealed hood, studded storm flap and adjustable cuffs.



Dover Jackets

Waterproof and windproof hydrafort polyester fabric, with anti-pill symmetry fleece reverse.

Taped seams, concealed hood, studded storm flap and elasticated cuffs.



Denby Convertible Work Wear Jacket

Hardwearing 80/20 polyester cotton fabric. Durazone polyamide overlays at wear points for added strength and durability. Durable water repellent finish with thermoguard insulation.

Converts into a body warmer with detachable sleeves.



Hi-Vis Softshell

Conforms to EN471 Class 2

Warm backed woven stretch softshell fabric. Wind resistant & water repellent.

Adjustable shockcord hem.



Hi-Vis Bomber Jacket

Conforms to EN471 Class 2

Waterproof hydrafort heavy duty Oxford polyester with a anti-pill fleece lined body.

Windproof & concealed hood.



Hi-Vis Shell

Conforms to EN343 Class 3.3 & EN471 Class 3.

Waterproof, windproof & breathable Isotex 5000.

Shown with optional trousers.



Fleeces

New Product
Range



Asguard II Fleece

250 series anti-pill symmetry fleece with quilted polyamide lining and thermoguard insulation.



2 zipped lower pockets, inside map pocket and adjustable shockcord hem.



Thor III Fleece

280 series anti-pill symmetry fleece. Fleece cuffs, 2 zipped lower pockets and adjustable shockcord hem.



Other colours available.
Sizes - S to XXXL



Barracade Fleece

250 series anti-pill symmetry fleece. Fleece cuffs and 2 lower pockets.

Available in black and dark blue only.
Sizes - S to XXXL

Softshell



Sandstorm Softshell

Hardwearing warm backed woven stretch ripstop softshell fabric, with durazone polyamide overlays at wear points for added strength and durability and with a water repellent finish.

Reflective trim to front and back.

Polo Shirts



Polo Shirts

65% Cotton, 35% Polyester
Machine Washable
240gsm Easy Care Fabric
Ribbed Collar & Cuffs
Sizes - XS to XXXL
Other colours available.



Workwear Trousers

**New Product
Range**



Premium Trousers

Hard wearing 80/20 water repellent polyester cotton.

Durazone reinforcements.



Action Trousers

170gsm polycotton fabric water repellent finish.

Reinforced seat & knees.



Action II Trousers

180gsm polycotton fabric water repellent finish.

Multi pocketed.

Kneepads



Regatta Safety Kneepad

EVA foam, ethylene & vinyl acetate.

Strong, lightweight, hardwearing and flexible.

Ergonomic design for advanced comfort and fit.

Compatible with all the above workwear trousers.

Regatta 
GREAT OUTDOORS





Body

Why not advertise your company name and logo. We offer a high quality Embroidery, Screen Print and Transfer Print service. Our delivery is quick and reliable. We consider all enquiries no matter how small. Prices on application.



Crew Neck T-Shirt SY

High Visibility T-Shirt.
100% Bird Eye Polyester.
Fabric: 180gsm.
Reflective Tape.
EN471 Class 2.
Left Breast Pocket.



Hooded Sweatshirt SY

Mens hooded sweatshirt.
280 gsm fleece fabric.
100% polyester.
EN471 Class 3.
2 band & brace 3M.
Reflective sew on tape.



Premium Sweat Shirt

Heavy 65%, cotton 35%, polyester.
Fashionable drop shoulder style.
Cover seamed neck, shoulders
armholes and waistband.
High quality ribbed cuffs and
Waistband.
Locker patch.



Premium Polo Shirt

Heavy knit pique Polo Shirt.
High natural cotton content for
wearer comfort.
3 matching button Placket.
Cuffed Sleeves.
Taped Neck.



Endeavour Fleece

High Quality
360gms micro fleece with full zip
front.
Concealed lightweight hood with
drawcord.
Yoke shoulders with contrast piping
Rib knitted waistband and cuffs
Two lower pockets with zip closure
Fully lined
Colours: Navy, Royal Blue, Black and
Grey



B-Dri Super Bomber Jacket

EN471 Class3.
Heavyweight 100% polyester with
PU coating.
300 Denier outer fabric with sewn
on tape.
Two-way heavy duty zip front
with storm flap.
Fleece lined collar.
2 lower bellows pockets with
flaps.
Security and phone pockets.
Rear hem access for ease of logo
applications.
Knitted storm cuffs.
Reflective material.
Colours: Satin Yellow and Orange



Polo Shirt SY Short Sleeve

EN471 Class 2.
100% polyester.
3 Button placket.
Grey trim on collar and sleeve cuffs.



Polo Shirt SY Long Sleeve

EN471 Class 3.
100% polyester.
3 Button placket.
Grey trim on collar and sleeve cuffs.
Reflective material.



Body



Constructor Bomber

Fully taped seams.
2 Lower front pockets with flaps.
Internal breast pocket.
Concealed hood/drawcord in collar.
GORT 3279. (orange only)
Colours: Satin Yellow or Orange.



Carnoustie Fleece Jkt S/Y

High density 300gm polyester fabric
Fully EN471 compliant
3M reflective tape
Drawcord at hip
Fully interchangeable with 'CAR' Carnoustie Jacket



Bodywarmer SY

EN471 class 2.
GO/TR 3279.
PU coating to hi-vis side.
Reversible bodywarmer 'zipout'.
Knitted collar.
Heavy duty zip.
Grey polycotton lining on reverse.
2 zipped pockets on both sides.
Mobile phone compartment on quilted side.
Reflective Material.



Bi-Dri Super Jkt SY

EN471 Class 3.
Breathable fabric.
Polyester with PU coating.
Concealed hood.
Full zip front with double storm flap.
Self double yoke back.
Lower pockets with flap.
Elasticated storm cuffs.
Stitched and welded seams.
Reflective material.



Polo Shirt L

200gms 65/35% polycotton
3 Buttons
Cuffed sleeves
Side vents.
Colours: Black, Blue, Green, Red, Yellow and White



Jerkin Sy Long Sleeve

EN471 Class 3.
100% polyester.
Velcro fastening.
Reflective material.



Rail Spec Vest Large

GO/RT 3279.
EN510: 1994.
HV polycotton.
All velcro closure.
Reflective material.



Vest SY

EN471 Class 2.
100% polyester.
Velcro fastening.
Reflective material.
Available in Hi Viz Yellow & Orange.



Flame Retardant Vest

EN471 Class 2 Vest.
EN533 Flame Retardant.
Use only over EN533 Index 2 or 3 materials.
Velcro fastening.
Reflective material
Do not wear next to skin.
Colours: Satin Yellow and Orange.



T-Shirt

100% Cotton.
Twin needle stitching.
Generous sizing.
180gsm premium weight.
Colours: Black, White, Yellow, Red, and Green.



Legs



Bi-Dri Super Trs SY

EN471 class 1.
EN343 class 2.
Breathable fabric.
Polyester with PU coating.
Over trousers with elasticated waist.
Studded ankles.
Reflective material.



Action Work Trousers

Polycotton.
Zip fly.
7 zip pockets multi-sized.
Double seat and knee patches.
Colours: Black and Grey.



Trousers SY

EN471 Class 1.
GO/RT 3279. (orange only)
Heavyweight PVC coated polyester.
Elasticated waist.
2 position stud adjustment to legs.
2 side pockets with storm flaps.
Fully taped seams.
Reflective material.



Click PC Combat Trousers

Polycotton
Zip fly and belt loops
Adjustable clips
2 front pockets with button flap
2 lower pleated pockets with button flap
2 rear pockets with button flap
Drawcord ankles

First Aid Kits

First Aid Kit - 50 Person



Kit Contains:

1 x Guidance note
8 x Non woven triangular bandages
4 x Large sterile dressing (180 x 180mm)
12 x Medium sterile dressing (120 x 120mm)
6 x Sterile eye pad dressing
60 x Assorted sterile transparent plasters
20 x Alcohol free cleansing wipes
3 x Pair disposable gloves
12 x Safety pins

First Aid Kit - 20 Person



Kit Contains:

1 x Guidance note
6 x Non woven triangular bandages
3 x Large sterile dressing (180 x 180mm)
9 x Medium sterile dressing (120 x 120mm)
4 x Sterile eye pad dressing
40 x Assorted sterile transparent plasters
10 x Alcohol free cleansing wipes
2 x Pair disposable gloves
12 x Safety pins

First Aid Kit - 10 Person



Kit Contains:

1 x Guidance note
4 x Non woven triangular bandages
2 x Large sterile dressing (180 x 180mm)
6 x Medium sterile dressing (120 x 120mm)
2 x Sterile eye pad dressing
20 x Assorted sterile transparent plasters
6 x Alcohol free cleansing wipes
1 x Pair disposable gloves
6 x Safety pins

Wall brackets are available for all First Aid Kits provided



Gloves



Economy Premier Latex Gloves

Designed for short term use.

Seamless cotton / polyester liner with a natural latex coating.

Standards
CE EN420

new



Premium Latex Gloves

Seamless cotton / polyester liner with a natural latex coating.
Standards CE EN420,
EN388 3142.

Nite Star Nitrile Gloves



100% Nylon seamless shell with nitrile coated palm and fingers. Lightweight for maximum dexterity and comfort with sensitivity. Ventilated back. Suitable for general assembly handling and engineering applications. Conforms to EN388 3.1.2.

new

Lightweight Nitrile Gloves



Lightweight coated glove offering flexibility/dexterity and the comfort of natural cotton with the protection of Nitrile. Resists abrasion, cuts and punctures for general purpose handling in many industrial sectors. Cat II EN388 2111.

new

Heavy Duty Nitrile Gloves



Heavy duty coated glove offering excellent protection in the more aggressive industrial applications. The soft jersey liner keeps the hand comfortable while the rugged Nitrile coating resists puncture cuts abrasions. Cat II EN388 4221.

new

Picolon Confort Poka



Lightweight, comfortable, seamless knitted glove with PVC dotted grip. Seamless knitted nylon glove. 100% nylon fibre with latex weaving for excellent fit. 2DO Polka Dot both sides and exposed first fingers and thumb tips.

Approved to BS EN 388:1994

new

Vygen PVC Gauntlets



Lightweight PVC chemical resistant gauntlet. Smooth finish. Liquid and mild chemical proof. Bactericidal treatment. Ideal for sub assembly work involving mild acting chemicals and water based lubricants.

Approved to BS EN 388:1994 and BS EN 374:1994.

new

Ansell Polar Grip 23-700



A rugged winter glove that resists salt, sheds water and keeps hands really warm.

Heavy duty fluorescent PVC coating. Foam lined. Maintains flexibility in sub-zero temperatures. Water repellent. Resistant to salt and caustic.

275mm Gauntlet. Approved to BS EN 388:1994, BS EN 374:2003 and BS EN 511.

new



Cowhide Gloves

Robust warm lined leather work glove. Full grain cowhide leather. Clute pattern with wing thumb. Elasticated cuff with integral vein patch.

Fully lined with fleeced cotton.

new



Ansell Hyflex 11-800

When handling small parts, especially where lubricating or preservative oil is present, HyFlex® 11-800 provides the solution. Ideal for general assembly and handling small or delicate components, the breathable foam nitrile coating improves grip and dexterity by wicking away surface oil.

new



Gloves

Foundry Heatbeaters



Heat Resistant Provides exceptional protection against heat. **Comfort** The cotton terry liner provides the wearer with exceptional comfort. **Contact Temperature** 500°C for 27 seconds. Available in 3 lengths for extra protection to the arm.

new

Kilnmaster Heatbeaters



Developed especially for Foundry and Kiln operatives. Aluminised Rayon back. Aramid/Glass Fibre palm. Kevlar® Sewn throughout. Approved to: BS EN 388:1994 Mechanical risks. BS EN 407 Thermal risks.

new

Disposable Nitrile Powder Free Gloves



Powder Free Nitrile Examination Gloves Disposable Gloves Conforms to EN388 and EN374-3 Sizes Small to Extra-Large

new

Marigold KT2 Thermal



Ideal warm liner glove for cold area product handling. One piece knitted Thermolite® fibre glove. DuPont Thermolite® fibre is machine washable, soft and non-chafing. Ideal as a liner under foodgrade latex/nitrile gloves.

Approved to BS EN 388:1994.

new

Impacto 502-10 Glove



Fingerless Lycra® glove. Suede leather palm and thumb. Standard cuff.

new

Latex Coldstar Glove



Mixed fibre heavyweight knitted liner with Latex coated to palm area. Vented back Highly visible fleece liner. Ideal for winter conditions. Thick latex coating for durability and grip. Conforms to EN388 1.2.4.1

new

Kevlar Latex Gloves



100% Kevlar machine knitted seamless construction liner. Flexible latex coating for added grip in both wet and dry conditions, offering excellent tear and puncture resistance.

Conforms to EN388 Mechanical Hazards. Sizes 9 & 10 available

new

Gripz Lite Gloves



Polyurethane coated knit wrist glove for grip and abrasion resistance.

Approved to EN388 : 1994 4131

new

Red PVC Gloves



Fully coated PVC Glove with a knitted wrist. Standards Cat II EN388 4121

new



Industry has found the glove holders to be very helpful. Now the gloves stay with the worker, ensuring they are on 'hand' when protection is really needed. Glove clip enables compliance with new Health & Safety directives.





Footwear

Chukka Boot Midsole

4 'D' Ring Boot with Midsole. Dual density PU anti-static sole. Conforms to EN345.
200 Joule steel toe cap
Shock absorber heel
Anti-slip
Leather upper
Anti-static
Acid & Alkali resistant
Oil resistant sole
Heat resistant to 200C



Waterproof Safety Boot

Dual Density PU Anti-Static Sole.
200 joule steel toecap and steel midsole.
Anti-slip and anti-static.
Leather upper.
TPU Sole resistant to oil, acid and alkali.
Heat resistant to 200 C
Waterproof breathable membrane lining.
Shock absorber heel.
Conforms to EN345 S3.



Rigger Boot Lined SUP 04

Dual density PU Anti-Static sole with midsole.
Resistant to oil, acid and alkali.
Cold Insulating.
Ultralight and Flexible.
High Sole Adhesion.
200 Joule Steel Toe Cap.
Shock Absorber Heel.
Conforms to EN345 S1P.



Rigger Boot Unlined

Dual density PU Anti-Static sole with midsole.
Resistant to oil, acid and alkali.
Ultralight and Flexible.
High Sole Adhesion.
200 Joule Steel Toe Cap.
Shock Absorber Heel.
Conforms to EN345 S1P.



Double Density Trainer Shoe

Black/Grey SBP Trainer Shoe.
Steel Toe Cap 200 Joule.
Steel Midsole.
Acid and Alkali Resistant.
Cemented, eva rubber Sole.
Anti Slip.
Leather Upper.
SBP.





Footwear

New
Products



Timberland Low Trek Safety Hiker

Nubuck leather and mesh combination upper for high breathability and abrasion resistance. Mesh lining for maximum airflow and comfort. EVA/Nitrile rubber sole for comfort, grip assurance and heat resistant to 300°C. High grip hard wearing outsole. Anti-static. Non-metallic/non-magnetic puncture resistant midsole.



Cat Powertrain SR-X Safety Hiker

Full grain leather upper. Moisture wicking lining for increased internal comfort. Lightweight PU midsole with SR-X slip resistant rubber outsole heat resistant to 300°C. Antibacterial insole with added internal cushioning. Anti-static. Stainless steel midsole, full padded collar, tongue and ankle for added comfort. 200 joule EN ISO 20345.



Timberland Mid Rock Safety Boot

Smooth full grain water resistant leather upper. Breathable moisture managing lining for comfort. Trail grip Nitrile rubber outsole with shock absorbing comfort layer. Heat resistant to 300°C. High grip outsole for maximum slip resistance. Anti-static. Stainless steel midsole. 200 joule EN ISO 20345.



Timberland S3 Modern Safety Boot

PRO boot for professional people. Water repellent leather. Moisture managing lining for comfort. Goodyear welt construction polyurethane midsole with rubber lug outsole, heat resistant to 300°C. Anti-static. Stainless steel midsole. 200 joule EN345 or EN ISO 20345.



Dr Martens Workman Safety Shoe

Undisputable Dr. Martens style and comfort. Black full grain leather. High wicking lining for extra comfort. Dr. Martens Workman sole, PVC outsole with shock absorbing PU midsole. Slip resistant. Anti-static. Stainless steel midsole.



Kynox Mariner Calf Safety Boot

Designed with people in mind, this boot features a YKK waterproof zip gusset for easier removal of the boot and 3M Scotchlite® tape. Full grain IDROTECH® leather upper. Protex® waterproof, breathable membrane. High wicking lining for extra comfort. Patented three-density VACUUM® sole unit with TPU disk buttons providing shock absorption and excellent slip resistance on uneven and wet surfaces. Anti-static. Composite midsole and toe cap.



Uvex Quatro 8411/2 Safety Boot

Full grain water resistant leather upper. Breathable Cambrelle® lining for extra comfort. Dual density PU sole. Anti-static. Stainless steel midsole. High comfort Hydroflex® GEL shock absorbing foot bed. Foam scuff cap to protect leather upper. 200 joule EN345 or EN ISO 20345.



Footwear

New
Products



Safety STOP Slip Resistant Safety Shoe

Excellent slip resistant shoe. Black leather upper. Cosmo lining for improved comfort and fit. Safety Stop® rubber outsole providing comfort, excellent slip resistance and flexibility. 100% non metallic. 200 joule EN ISO 20345



Slip-On Safety Shoe

Smart and safe classic styled shoe providing excellent slip resistance. Black leather upper. High wicking lining for extra comfort. Shock absorbing lightweight polyurethane midsole and rubber outsole for good abrasion and slip resistance. Anti-static. Deluxe footbed providing extreme comfort, ideal when working on your feet all day. 200 joule EN ISO 20345



Trojan S12 Safety Boot

Brown full grain floater leather. High wicking lining. PU/Rubber sole providing ultimate comfort and excellent slip resistance. Composite toe. Composite midsole. Anti-static. Wide fit. 200 joule EN345 or EN ISO 20345



Trojan G99 Safety Shoe

Black full grain floater leather. High wicking lining. PU/Rubber sole providing ultimate comfort and excellent slip resistance. Composite toe and composite midsole. Anti-static. Wide fit. 200 joule EN345 or EN ISO 20345



Trojan J80 Waterproof Safety Boot

100% waterproof Trojan boot. Full grain water repellent leather upper. Kingtex® waterproof lining. Dual density PU/TPU sole unit. Anti-static. Stainless steel midsole. 200 joule EN ISO 20345



Trojan K94 Safety Boot with Mid Sole

Improved Goodyear welted construction, now 23% lighter and more flexible. Full grain leather upper. High wicking lining for extra comfort. Rubber Goodyear welt construction outsole; heat resistant to 300°C. Lightweight Smartmask® technology shock absorbing puncture resistant airbag for extra comfort. Abrasion resistant leather around the boot that stands up to the toughest abuse. Stainless steel midsole. Padded insole for extra comfort. 200 joule EN ISO 20345



Combat Safety Boot

The new generation of rigger boots offering maximum protection and ultimate support. Black waxy leather upper. Fur lining to offer ultimate insulation. Rubber sole, heat resistant to 300°C. Anti-static. Stainless steel midsole. Scuff cap. Comfort padded collar, full bellows tongue. 200 joule EN345 or EN ISO 20345



Tel: 01179 828180 Fax: 01179 382818

54



Terms and Conditions

The Blinking Lamp Company Ltd policy is one of continuous improvement. Whilst every effort has been made to ensure that information given is correct at time of going to print, we reserve the right to alter or change product specification at any time.

Any product shown in both our printed or online publications does not represent endorsements by The Blinking Lamp Company Ltd of any other products, services or organizations. The colour reproductions of the garments featured in both our printed and online publications are as accurate as the printing or electronic process will allow.

Whilst The Blinking Lamp Company Ltd has made every effort to ensure that details and information given in both printed and online publications are accurate at the time of issue, it gives no guarantees as to the accuracy or completeness of such information. Full technical specifications are not necessarily included. Accordingly, the Purchaser should check any details and information they wish to rely on with The Blinking Lamp Company Ltd at the time of purchase. The Blinking Lamp Company Ltd accepts no liability in respect of any errors or omissions herein contained or for any loss or damage, malfunction or consequential loss arising from reliance upon our publications.

The Purchaser shall comply at all times with the written instructions and all written guidelines issued from time to time attached to the goods concerning their storage and use and the Purchaser shall refer its employees and its customers to such instructions and guidelines.

The Purchaser should satisfy itself that the person responsible for the storage and use of any goods supplied by The Blinking Lamp Company Ltd has all the information required on health and safety. The Blinking Lamp Company Ltd shall not be liable to the Purchaser in any civil proceedings brought by the Purchaser against The Blinking Lamp Company Ltd in respect of a breach of the user instructions or any applicable health and safety legislation or any regulations, orders or directions made pursuant to such health and safety legislation in force from time to time or under any directive, regulation, order or other instrument relating to health and safety where such exclusions of liability is permitted by law.

The Purchaser shall keep The Blinking Lamp Company Ltd properly informed of all complaints concerning the goods and shall comply with any directions of The Blinking Lamp Company Ltd in any issues, proceedings or negotiations relating to such complaint.

In the event of any recall of the goods by The Blinking Lamp Company Ltd the Purchaser shall co-operate fully and promptly with any steps taken by The Blinking Lamp Company Ltd under the condition below.

The Blinking Lamp Company Ltd may, at its discretion, recall any goods already sold by The Blinking Lamp Company Ltd to the Purchaser, (whether for a refund or credit or for replacement of the goods which shall in each case be undertaken by The Blinking Lamp Company Ltd) and/or issue written or other notification to the Purchaser about the manner of use of any goods already sold by The Blinking Lamp Company Ltd to the Purchaser. The Purchaser agrees to give all reasonable assistance to The Blinking Lamp Company Ltd or the manufacturer in resisting any claim which may arise under any recall of product by The Blinking Lamp Company Ltd or the manufacturer of such product.

A full copy of our terms and conditions is available upon request.

The Blinking Lamp Company Limited
Unit F, Motorway Distribution Centre, Avonmouth Way,
Avonmouth, Bristol, BS11 9YT
Tel: +44 (0) 1179 82 81 80 – Fax: +44 (0) 1179 38 28 18
Email: office@blinkinglamp.co.uk
www.blinkinglamp.co.uk



Unit F, Motorway Dist Centre, Avonmouth Way, Avonmouth, Bristol, BS11 9YT
Tel: 01179 82 81 80 Fax: 01179 38 28 18
Email: office@blinkinglamp.co.uk